

The Difference between GL-4 and GL-5 Gear Oils by Richard Widman

There is a lot of confusion about gear oils and the API classifications. In this paper I will try to differentiate the two oils and clear up the mysteries that are flying all over the internet. It is extremely common, or normal, for all GL-5 oils to claim they cover the API GL-4 requirements for gear oils. ***This is a true statement.*** Does that make them satisfactory for synchromesh or synchronized transmissions? **NO!** They meet the GEAR OIL specifications, not transmission oil specifications. The API GL-4 and GL-5 categories do not mention or have anything to do with transmission synchronizers.

History:

The gear oils of a few decades ago had lead additives that were effective at wear reduction, but not very good for the environment. A long time ago they began to be replaced by gear oils with a phosphorous additive (in itself a decent anti-wear additive) with active sulfur to grip hold of the gears and create a very solid sacrificial layer of material that could be worn off, thereby protecting the gear surface. Eventually it was discovered that the active sulfur was causing corrosion of brass and other soft metals used in differentials and transmissions.

Somewhere around 20 years ago a deactivated or buffered sulfur was developed that would react with the phosphorous to create the protective/sacrificial layer in the conditions created in the gear boxes (temperature and pressure) without being corrosive to the brass, copper, etc. **This additive system is used in most gear oils today.**

The problems arise when we try or need to use the same product in the transmission that we use in the differential. Many people have called oil companies and been told by the “Techs” that answer their questions that their oils have buffered sulfur and therefore are not corrosive to yellow metals, therefore their GL-5 oils can be used with brass components. While that answer is totally correct, it does not address the question asked: *Can I use your GL-5 in my synchromesh transmission?*

Lets take a look at the API GL-5 rating. It is a rating for EP (Extreme Pressure) protection. The higher the EP protection, the higher the GL category. In the mid 60's, Ford needed better protection in their pickup trucks and GM developed the front wheel drive Oldsmobile Toronado that had a differential with a very high angle of contact for power transmission to the wheels so a higher category was developed (later to be called GL-6) to offer the protection needed. This level of protection can still be claimed, but can no longer be tested since the Toronado rig used to test it is no longer available. (Note: The 1966 and 1967 Toronados had sun gears between the axle shafts instead of spyder gears and a very high offset, while suffering from the high temperatures of the engine compartment and very high pressures.) This is why you will frequently see GL-6 listed as “obsolete”. The test is obsolete, not the car or its needs. Many other high performance cars continue to spec this level of EP performance.

In normal operation, the sulfur/phosphorous additive forms a black sacrificial coating on the gears and anything it touches with a little pressure and temperature. As the gears turn, instead of wearing, the sacrificial coating of additives is peeled off or worn off. This is normal and acceptable in all steel gears. But when one or more of the surfaces is brass or another soft metal, the sacrificial coating is stronger than the base metal, and instead of just peeling off, it takes with it a few microns of brass that it is bound to.

A normal GL-4 gear oil of any given viscosity has about ½ of the level of sulfur/phosphorous additive that would be in the GL-5 product, so the bond is not as strong, and therefore can be peeled off without peeling a layer of brass (or less brass). This means that the GL-4 product provides a little less extreme

pressure protection, so in the differential of a high powered car, it would not be the ideal product in the differential. To understand this need we should be aware of the fact that the differential is where the final torque is applied to the wheels (in most applications).

But in the transmission, we should consider two factors:

- Do to the fact that the differential applies the final torque, normally we do not need the full EP protection in the transmission where less torque (about 30%) is applied.
- We need to be able to break the EP protection to stop the spinning of the gears long enough to mesh them or synchronize them.

When we use a GL-5 product in a transmission that requires GL-4, we normally find 2 to 4 times as much copper in the used oil as we would with a GL-4 product. Eventually the synchronizers wear to the point that they no longer make contact with the other half of the cone, bottoming out before stopping the opposing gear. (*Refer to the picture below.*)

GL-3

It should be noted that while GL-3 is frequently considered obsolete since it has less protection than the GL-4, many transmission manufacturers today specify GL-3 (Chrysler and Mitsubishi among them). There are many formulations of GL-3 oils in the market, some with sulfur/phosphorous additive and some with zinc/phosphorous. Almost any motor oil classifies as a GL-3 or GL-4 in gear protection.

Synchromesh transmission oils

General Motors, Honda and others have developed oils that combine the best shift characteristics with their transmission components for reduced wear. These products in general could classify as GL-4 oils if they wanted to, but actually when we analyze their components they are very similar to 5W-30 diesel motor oils, with a few friction modifiers added. They are way too thin for a Corvair transmission.

Transaxles

So what do we put in transaxles where the transmission and differential are combined in one unit? This is a good question, and the answer lies in the design and surface area of the gears. If the contact surfaces of the gears is big enough to carry the weight and torque necessary, we depend less on the oil and its additives. If the surface area is compact, we need to depend more on the additive's ability to handle the boundary lubrication. When we have transaxles, we have to depend on the manufacturer to tell us what product is correct.

When we have transaxles we also need to be aware of whether the differential portion uses *Limited Slip* "LSD" technology of some kind that limits the slipping of the wheels in mud and snow. This requires an additive that lets a clutch bind the wheel movement together at a certain speed differential. This additive can be in any oil. Many oils have a small amount. This is often enough for some differentials as long as they were not rinsed out. Some systems need more additive than others. You can usually tell if you need more additive by making a U-Turn. If the inner wheels click or try to lock up on the turn, you need more additive. Often an oil that has a little of this additive will say it is satisfactory for "service fill" or "top-off".

How can you tell whether or not you have a limited slip differential? That is the easy part: Jack up both driven wheels and spin one of them with your hand (transmission in neutral) if the other wheel spins the same way, you have a limited slip differential. If it spins in the reverse direction, you do not.

You will find numerous wrong comments on forums and other sites where users claim that GL-4 means LSD. That is totally false. A check of the API site could have set them straight.

Engine/Transaxle combinations

While not used in any Corvairs, there are cars where the same oil sump is used for lubrication of the engine, transmission, and differential. With this design, the parts of the transmission and differential are dimensioned for use of a GL-4 (or perhaps at one time even a GL-3). As far as I know, most have been fairly low HP engines, and where the higher HP (turbo versions) were offered, synthetic oil was recommended. One caution that is not often mentioned in those manuals: The multigrade oils used should be group II or stronger, or you should avoid extending the interval beyond what is mentioned. The lesser quality multigrade oils tend to get their polymers ground or sheered in the gears, just like some of the sludge prone OHV engines of today where gears are used for synchronization of the cam and crank. Note: Corvair engines do not suffer from this due to the large diameter of the synchronization gears in the engine.

We can also note that the Chevrolet Luv pickups, as well as the Isuzu Rodeo and Trooper and many others have recommended motor oil in the transmission for many years, even though they have separate compartments. They only use gear oil in the differential.

The concept of using motor oil in these situations goes back to what I said towards the beginning. Most motor oils can qualify for GL-4 (or at least GL-3) EP protection. As long as the torque on the gears in low speed sliding action does not exceed what is covered by the GL-4, there is no benefit to sulfur/phosphorous additives, but there is one for the synchronizers.

In the case of those single compartment motor/transaxle, there is an additional benefit of constantly filtering the oil. The risk is that if you get gasoline in your oil you will thin out hydrodynamic film protection in the gears. If you are running a mixture too rich, the additional soot (carbon particles) will wear the gear surfaces as well as your camshaft.

Viscosity:



First it should be noted that the SAE motor oil viscosity chart (J300) is different from the SAE gear oil chart (J306). A SAE 40 motor oil has approximately the same viscosity as one of the thinner SAE 90 gear oils, while the SAE 50 Motor oil is similar in viscosity to the thicker SAE 90 gear oils.

Viscosity has nothing to do with API Gear Oil classification (GL-4, GL-5, etc.). Some manual transmissions specify an ATF (Automatic Transmission Fluid), others a SAE 75W-80 (almost the same viscosity as the ATF), others a 75W-90 or 80W-90. Some specify a SAE 50 motor oil or SAE 50 CAT transmission oil. The oil viscosity should be chosen according to the manufacturer's recommendations for the temperatures where you will drive.

- If it is too thick (viscous) it will not displace fast enough from the synchronizers and will heat up your transmission and cause hard shifts.
- If it is too thin it will not provide the hydrodynamic lubrication that is required between gears and in the bearings or bushings.

If we look at the service manual, the one I have from 1960 recommends SAE 80 Gear oil, although I've heard that some recommended SAE 90 for hot climates. While I do not have a SAE J306 viscosity chart earlier than the 1996 update, in the graph below we can see what those viscosity limits were in 1996, with the blue being the range for SAE 80 and red being the range for SAE 90. What this means is that any given brand had to stay within that range for that weight of oil.

You will note a huge range is possible between different brands within each range. In the chart on the right you can see that the 80W-90 gear oils on the market today are thinner than the thinnest SAE 90. You could actually use a synthetic 75W-140 if you could find it in a GL-4.

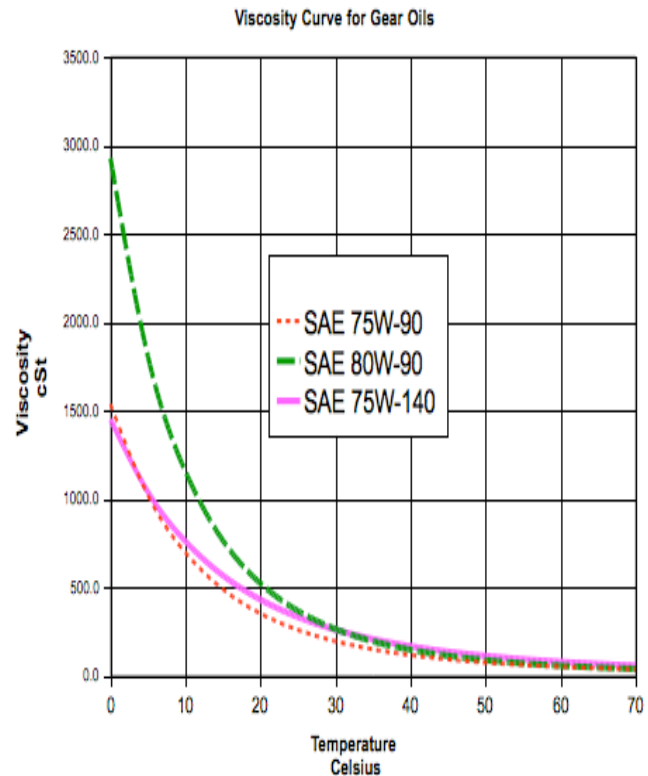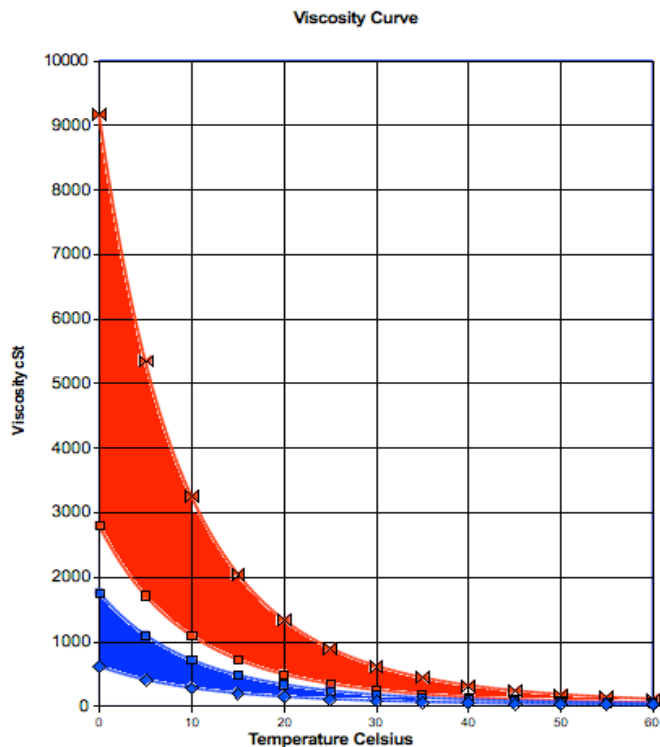


Recommendations


In general you should use your manual. Nobody knows the vehicle more than the people who put it together. The exceptions are cars like the Corvair where oils have changed dramatically since the manuals were printed. There are other exceptions where those who write manuals have no idea how a transmission works and are guided by wrong information from oil salespeople.

For the Corvair:

- Considering that most Corvairs have seen a lot of miles, there is probably some wear in the transmission, so we should look at the higher viscosities within the recommendations.
- This is a car that was produced long before any of the oils that are on the market today. My car was a perfect example of what happens if you do not have any EP additives. The teeth on the synchronizers were in excellent condition. But the rest of the transmission had severe signs of wear. (*See picture below*)

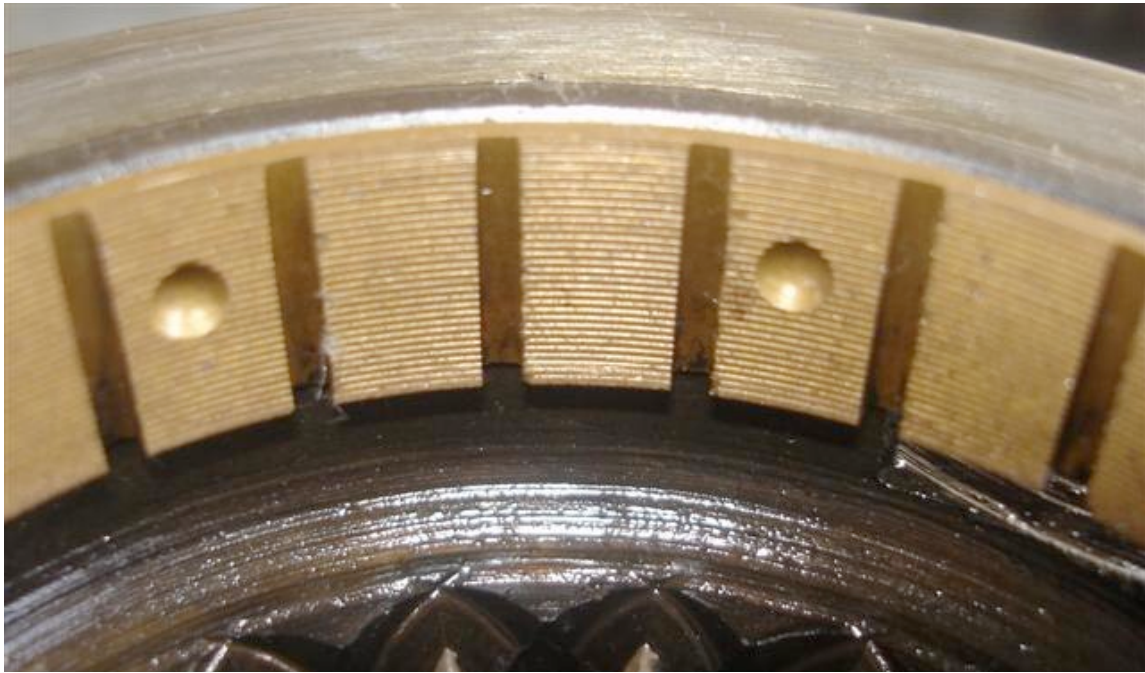

- Too much additive may reduce the wear on gears, needle bearing, and shafts in certain conditions, but will wear out your synchronizers. You need to look for a GL-4 oil that does not include GL-5 in its label, even though it looks good, even though it claims GL-4/GL-5 on the label. The Corvair differential is well built with parts much bigger than those of many cars today. Those gears can carry the power of the car. You can see in the following picture of a Toyota synchronizer how the brass synchronizer has worn so much that the entire ring bottoms out and no longer grabs.

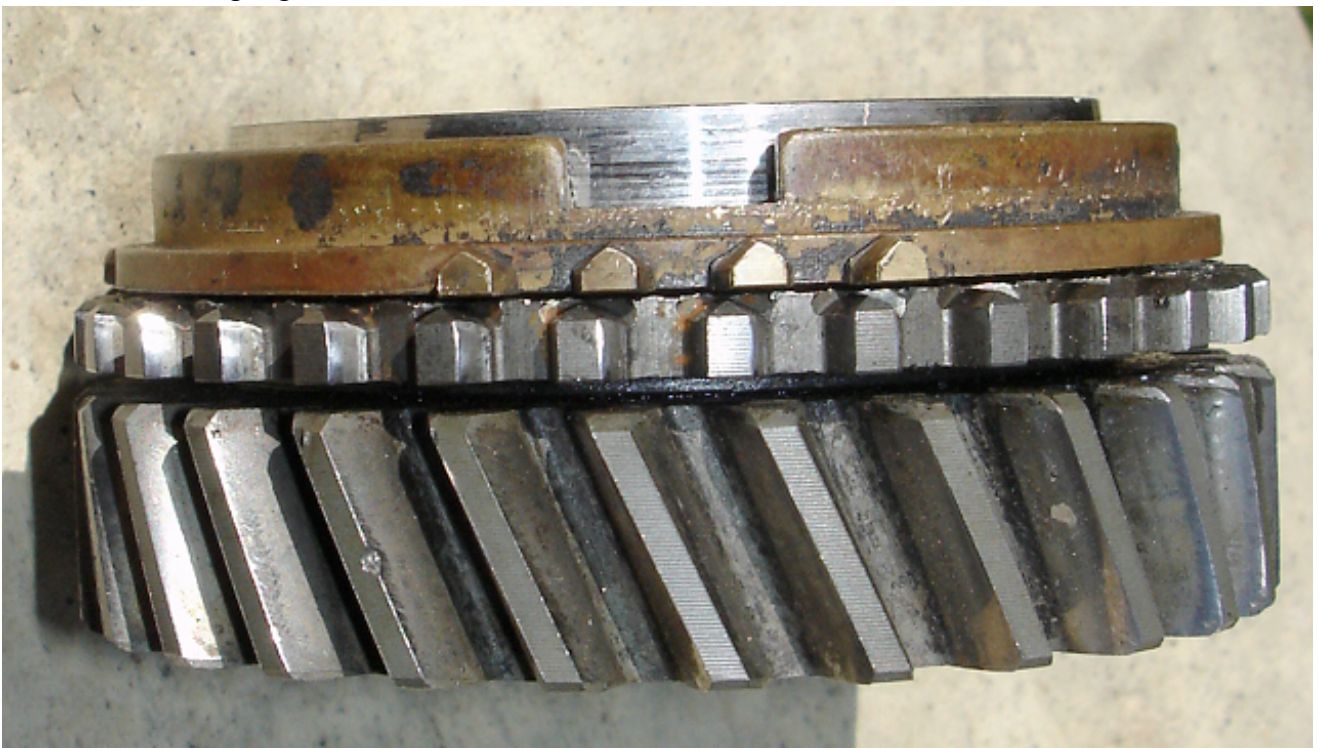

- For most climates, the SAE 80W-90 is the best viscosity. But there are synthetic products available that cover that full range with a SAE 75W-90 rating. This would be even better especially in cooler climates. The trick in this formulation is a very high viscosity index in the synthetic base oil. See the chart at the end of this article to see how a few typical oils react to different temperatures. You should note that you may need to shift well below the -20°C shown as a starting point in these graphs. In this case, the synthetic oil is your best bet. Most manual automotive transmissions will run between 30°C and 50°C in normal operation.
- Corvairs with automatic transmissions: This is much simpler. Just use a good Dexron III in the transmission and a good GL-5 in the differential, adding the LSD additive if the oil manufacturer does not include it and if you have “*positraction*”. They may or may not include it. You have to read the label or spec sheet. As an example, I have
 - 75W-80 GL-3 without LSD
 - 75W-90 GL-4 with LSD and without
 - 75W-90 GL-5 with LSD and without
 - 80W-90 GL-4 with LSD and without
 - 80W-90 GL-5 with LSD and without
 - 75W-140 GL-5 Synthetic with and without LSD
 - 85W-140 with and without LSD

To confuse things a little more, we have to read the literature and sometimes consult with the manufacturers. In looking for a few GL-4 products that would meet our needs, I identified Redline MT-90 as a candidate, but then saw this on their website. I ■ MTL & MT-90 are not for use in differentials with hypoid gears questioned them and received this response.

“In your Corvair manual transaxle I would recommend the 75W90NS as a GL-5 type gear oil was originally called for. A GL-4 gear oil is suitable for use in a zero or low offset hypoid gear application, where extreme pressures of a high offset hypoid are present a GL-5 gear oil is required. In your transaxle where high offset gears are not present, a GL-4 gear oil could be used though we would recommend a GL-5 as called for.”

While he confirms that the Corvair does not have high offset hypoid gears (*“In your transaxle where high offset gears are not present”*), he says he recommends his GL-5 product because the Corvair originally recommended GL-5 (*“a GL-5 type gear oil was originally called for”*). There is a problem with that statement: The GL categories are based on the ASTM STP 512 standards which were originally developed in 1972, three years after the end of the production of the Corvair.

Here is a clarification from Lubrizol (one of the premier additive companies)

- API Category GL-4 designates the type of service characteristic of spiral-bevel and hypoid gears in automotive axles operated under moderate speeds and loads. These oils may be used in selected manual transmission and transaxle applications.
- API Category GL-5 designates the type of service characteristic of gears, particularly hypoids in automotive axles under high-speed and/or low-speed, high-torque conditions. Lubricants qualified under U.S. Military specification MIL-L-2105D (formerly MIL-L-2015C), MIL-PRF-2105E and SAE J2360 satisfy the requirements of the API GL-5 service designation.

Summary

Just remember that GL-4 and GL-5 are gear oil ratings, **not transmission oil ratings**. Transmissions have gears *and* synchronizers. These seemingly conflicting requirements must be met differently.

When someone tells you that their GL-5 covers GL-4, remember they are correct as far as EP protection, but that is only half the answer. When they say their Sulfur/Phosphorous additive will not corrode the yellow metals, they are also correct, but if there are enough to meet GL-5 protection, they will slowly peel away your brass synchronizers.

What should you do if you cannot find a GL-4 that does not include GL-5 on it's label? My next choice, and one I almost did even though I have plenty of GL-4 80W-90, would be a SAE 50 oil that meets CAT TO-4 specifications. My third choice would be a SAE 50 diesel motor oil of the highest API classification I could find, preferably group II. As you will see on the graph below, the temperature curve for a SAE 50 motor oil (or CAT transmission oil) and a SAE 80W-90 are very similar.

What should you do if you've put a bigger engine in the Corvair or dramatically increased the HP? I would use a synthetic GL-4 oil. If I felt it was not enough (gut feeling, stubbornness, etc.), I would send it away for analysis, then use a GL-5 for the same period of time and analyze it. If the GL-4 is not sufficient protection, it will show up in iron particles in the sample. The GL-5 might reduce the iron wear, but you can see for yourself how much copper increases. The only problem with this is the sample base is not statistically valid. But it will give you more than a guess.

Here is a simple explanation of the problem from Nissan:

Warning:

If Nissan service manual asks for API GL-4 rated oil than you have to use API GL-4 oil. GL-5 is NOT made to replace GL-4. DO NOT USE GL-5, it will destroy your transmission.

It is interesting to note in this explanation by Lubrizol how the new (replaces the GL-5 rating) SAE J2360 is explained:


“SAE J2360 is a global quality standard specified by many North American OEMs and by growing numbers elsewhere in the world. The rigorous approval requirements, including controlled field testing and independent committee review, ensure that products approved under the SAE J2360 Standard meet the very highest demands of axles **and non-synchronized manual transmissions.**” (*emphasis added*).

The important part of that statement for us is the last part: “**and non-synchronized transmissions**”, since our transaxles are synchronized.

Here is a synchronizer that has been worn by GL-5 oil. You will note that there are no longer any teeth on the brass, completely worn or “peeled” away




Here is a chart that shows the behavior of several transmission oils at start-up temperatures.

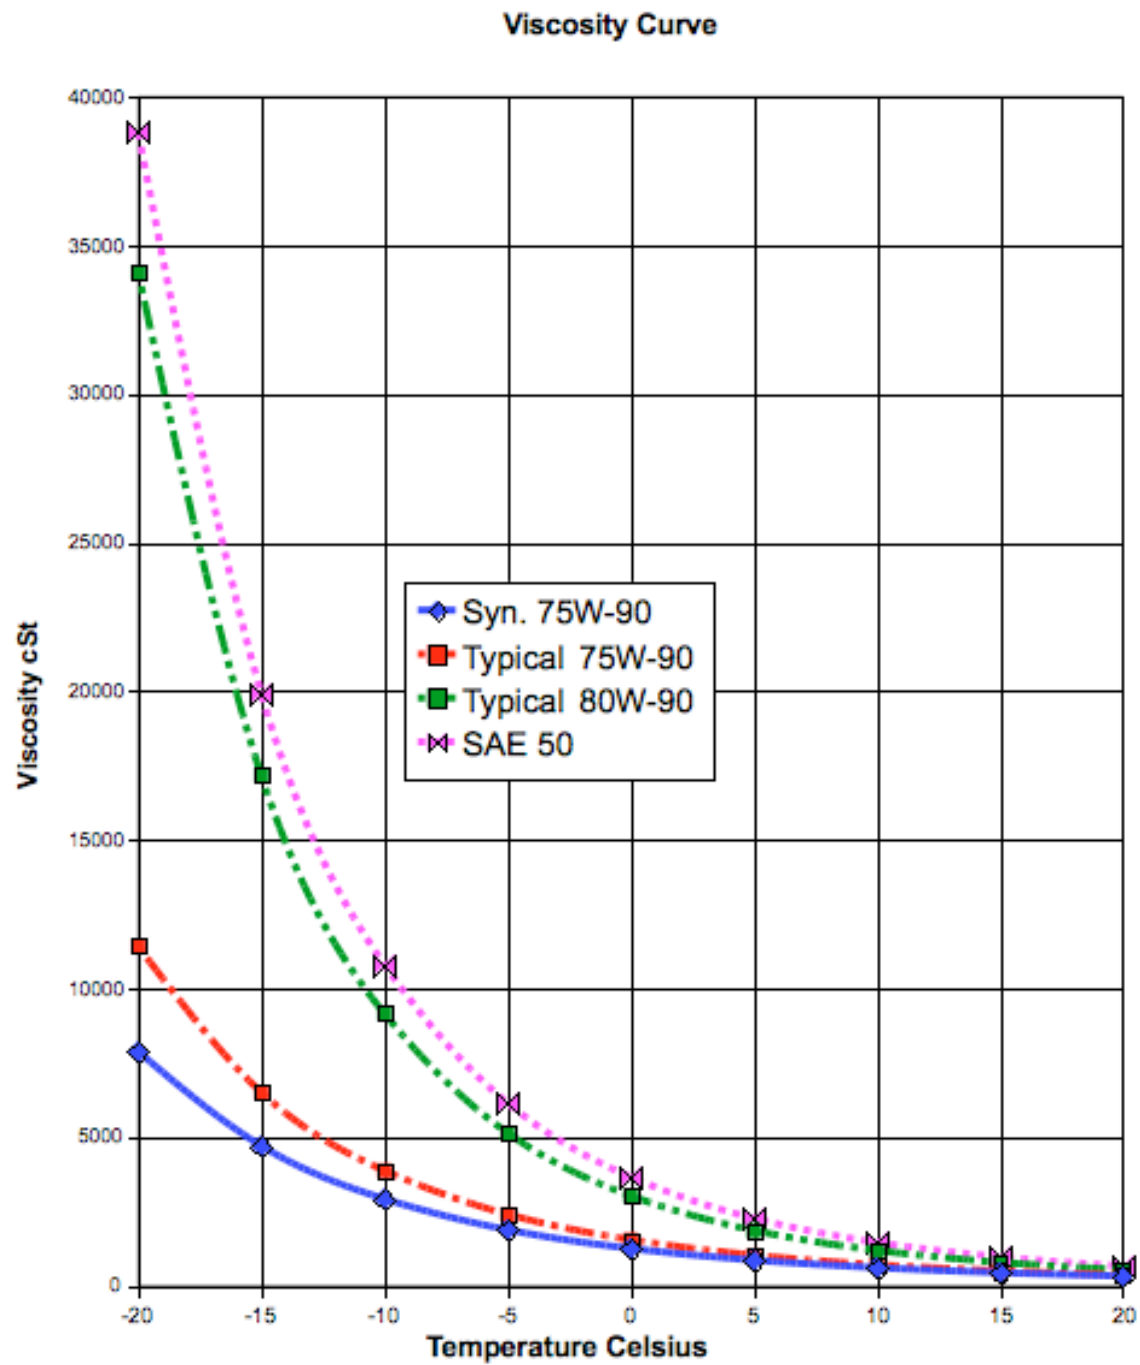

Here are those same oils in normal operating temperatures once everything has warmed up.

Viscosity Curve

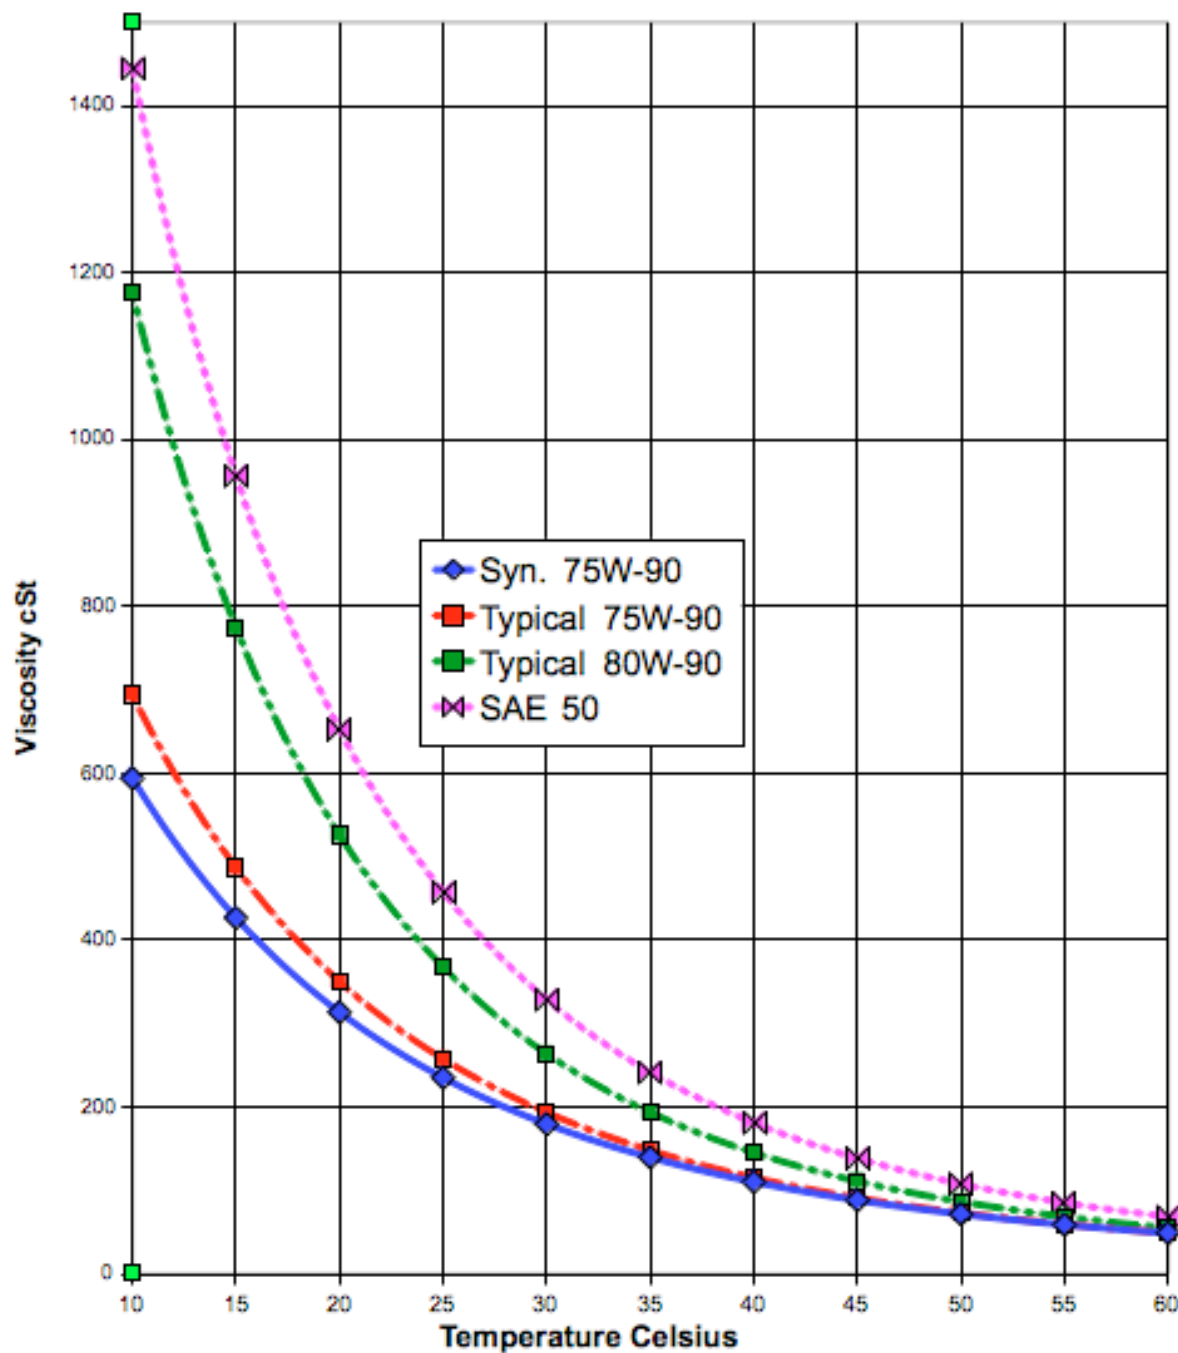

Product possibilities

I hate to call these recommendations, but will list what I can of products that I know of and that are available in the US. As always, this is as of this writing, and all information is gathered from the Internet. Local availability will vary.

First lets remember that the details are in the spec sheets. Some brands make it hard to find the information.

I can applaud Mystic Oil's clarification when they start their spec sheet this way (although later in the sheet they only mention the various GL classifications. Note how they say “*and non-synchronized manual transmissions.*”

**For API Gear Lubricant Service: GL-2*, GL-3*, GL-4, GL-5, GL-6*, MT-1
For Service Fill Limited Slip Axle Lubrication**

Mystik JT-7 Multi-Purpose Gear Lubricants are multi-purpose, thermally stable, sulfur-phosphorus extreme pressure (EP) gear lubricants that exceed the performance requirements of the latest axle and non-synchronized manual transmission specs, MIL-PRF-2105E, and Mack GO-J. A specially

Texaco, on the other hand, does not mention this limitation, although it is the same. They just don't mention transmissions at all in their 80W-90 gear oil. They leave it up to the consumer to realize that transmissions don't use normal gear oils (as such).

Havoline Gear Oils:

- meet the performance requirements of **API Service Categories** MT-1, GL-4, and GL-5
- are qualified for **SAE J 2360** (formerly known as MIL-PRF-2105E)

The list:

My list is a short one. If you want me to add something I can look at it if you send me a link. I've been looking and don't see much. These are listed in alphabetical order.

- Amsoil Synthetic manual Transmission and Transaxle Gear Lube 75W-90 GL-4
- Citgo Citgear Standard XD 75W-90 GL-4
- Pennzoil Gearplus 80W-90 GL-4
- Pennzoil Synthetic 75W-90 GL-4 (from the spec sheet, the best overall viscosity curve)
- Quaker State Multi-purpose Gear Lubricant 80W-90 GL-4
- Redline MT90 is a good possibility, although their web page has this disclaimer. Note my observations on page 6.
 - MTL & MT-90 are not for use in differentials with hypoid gears
- Shell Spirax G SAE 90 GL-4 (I do not recommend this due to it's extremely high low temperature viscosity.)
- Shell Spirax GX 80W-90 GL-4 (I do not recommend this due to it's low high temperature viscosity)
- Chevron had a product called Chevron Manual Transaxle oil that was excellent, but I cannot find it except in clearance sites. I don't know if it has been replaced.

In general I would not use a 75W-90 in a Corvair transmission unless it was synthetic, but there are some very good GL-4 Synthetic 75W-90 oils in the market for Mercedes, Volvo and Mack truck and bus transmissions.

I hope this clears up some of the confusion and avoids transmission damage.

If you have additional questions, feel free to send them to me at oil@asboman.com

If you have not read the report on motor oils, you can find it here:

[Selection of the right motor oil for flat tappet engines.](#)